

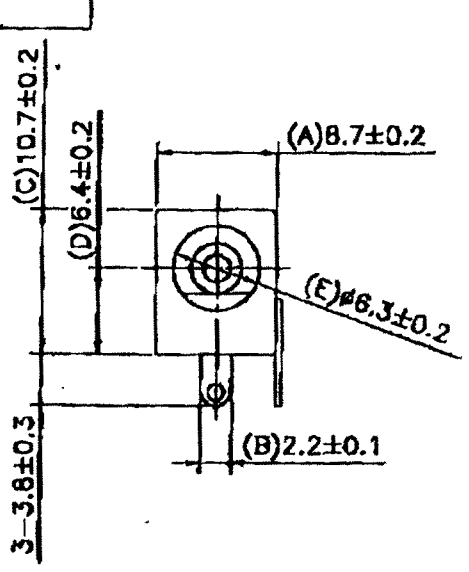

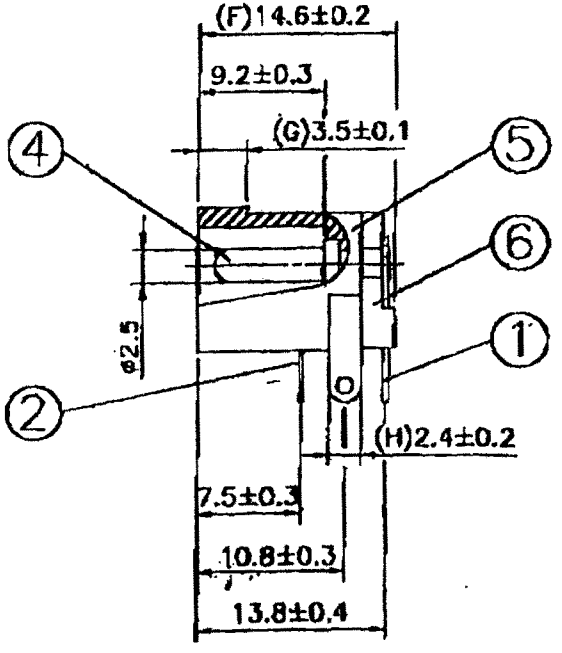

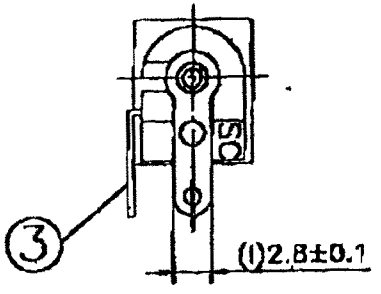

SPECIFICATIONS:

Contact Resistance :30mΩ max
Insulation Resistance :100M min. at DC 500V
Dielectric Withstand Voltage :AC 500V for one minute

NO.	Description	Material	Q'TY	Finish
6.	Cover	PBT + 30% Fibre Glass	1	Black Color
5.	Housing	PBT + 30% Fibre Glass	1	Black Color
4.	Pin(2.5ø)	Copper	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated

PIN HOLE LAYOUT
(JACK BOTTOM VIEW)

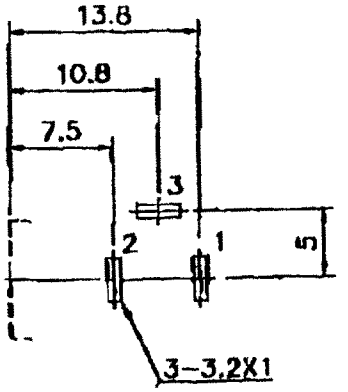

PART NAME : DC POWER JACK	PART NUMBER : SCD438DCS011000	VERSION: 1	DATE	DWN	CHKD	APVD	MANAGER
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:2/1	10.21.1999	SONJA			